



PX1.2-6 6Volt 1.2Ah

Specifications

Nominal Voltage(V)	6V		
Nominal Capacity			
20 hour rate (0.06A to 5.25V)			1.2Ah
10 hour rate (0.114A to 5.25V)			1.14Ah
5 hour rate (0.204A to 5.1V)			1.02Ah
1 C (1.2A to 4.8V)			0.68Ah
3 C (3.6A to 4.8V)			0.48Ah
Weight	Approx. 297g(0.65Lbs.)		
Internal Resistance (at 1KHz)	Approx. 41 mΩ		
Maximum Discharge Current for 5 seconds:	18A		
Charging Methods at 25°C(77°F)			
Cycle use:	7.20 to 7.50V		
Charging Voltage	7.20 to 7.50V		
Coefficient -5.0mV/ °C/cell			
Maximum Charging Current :	0.36A		
Standby use:	6.75 to 6.90V		
Float Charging Voltage	6.75 to 6.90V		
Coefficient -3.0mV/ °C/cell			
Operating Temperature Range			
Charge	-15°C(5°F)	to	40 °C(104°F)
Discharge	-15°C(5°F)	to	50 °C(122°F)
Storage	-15°C(5°F)	to	40 °C(104°F)
Charge Retention (shelf life) at 20 °C(68°F)			
1 month			92%
3 month			90%
6 month			80%
Case Material	ABS UL94 HB		
Option: Flammability resistance of (UL94 V-0)			
Terminal	F1 or F2 (Faston Tab 187 or 250)		


Dimensions

mm(inch)

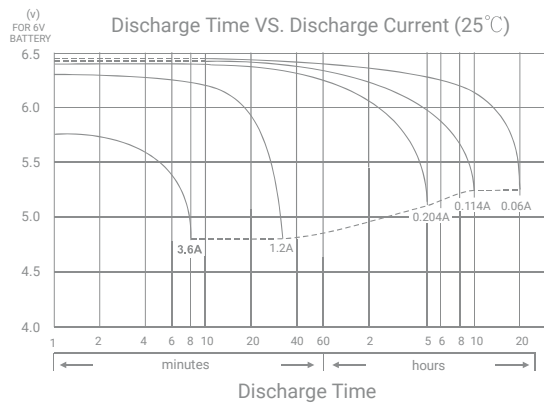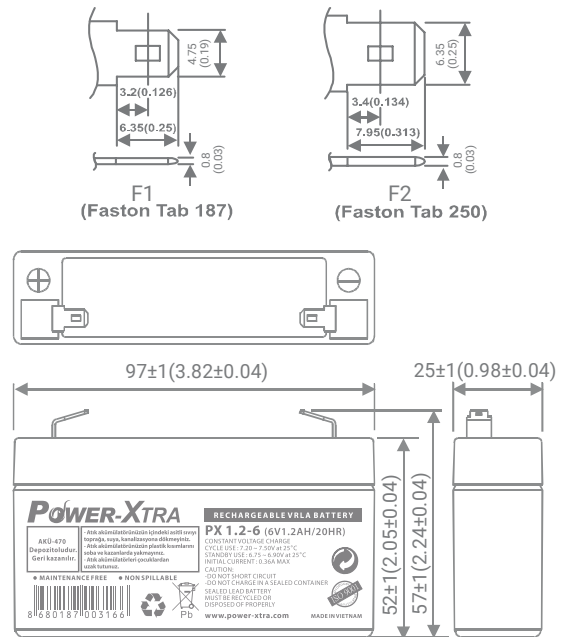


PX1.2-6 6Volt 1.2Ah


Effect of Temperature on Capacity 25°C(77°F)

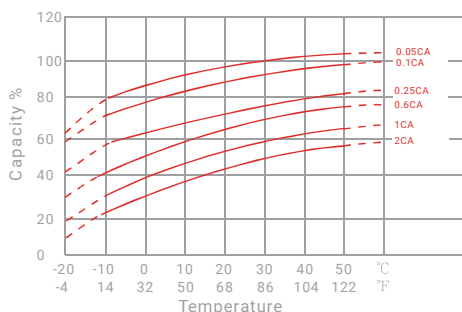


Capacity Retention Characteristic

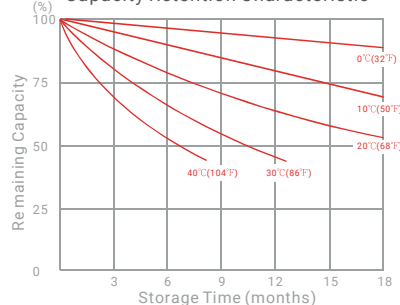

Trickle (or float) Service Life



Cycle Service Life

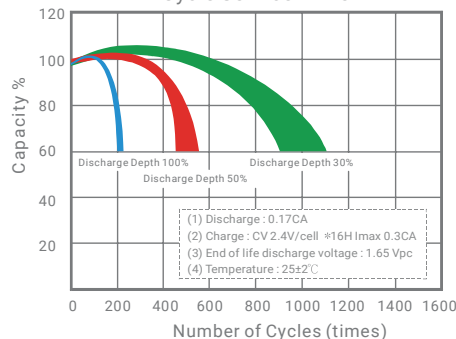

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	7.18	7.82	8.27	8.65	8.80	8.98	9.28
10	min	4.62	5.00	5.30	5.52	5.58	5.67	5.77
15	min	3.65	3.87	4.05	4.20	4.25	4.32	4.38
30	min	2.15	2.25	2.32	2.37	2.38	2.42	2.45
60	min	1.32	1.39	1.43	1.47	1.48	1.50	1.52
120	min	0.747	0.808	0.847	0.875	0.887	0.900	0.915
180	min	0.533	0.573	0.602	0.623	0.633	0.645	0.657
240	min	0.435	0.470	0.495	0.513	0.520	0.528	0.537
300	min	0.420	0.442	0.457	0.468	0.472	0.477	0.482
600	min	0.220	0.233	0.243	0.250	0.252	0.255	0.258
1200	min	0.123	0.126	0.129	0.130	0.131	0.131	0.132

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	3.49	4.11	4.57	4.94	5.09	5.26	5.51
10	min	2.12	2.43	2.63	2.81	2.88	2.96	3.11
15	min	1.71	1.95	2.09	2.20	2.24	2.29	2.35
30	min	0.931	1.06	1.17	1.24	1.26	1.29	1.32
60	min	0.680	0.716	0.735	0.759	0.765	0.772	0.779
120	min	0.392	0.415	0.429	0.440	0.444	0.449	0.456
180	min	0.272	0.291	0.302	0.311	0.314	0.318	0.324
240	min	0.223	0.238	0.247	0.254	0.257	0.260	0.264
300	min	0.207	0.219	0.226	0.231	0.233	0.236	0.238
600	min	0.112	0.117	0.121	0.124	0.125	0.126	0.127
1200	min	0.0615	0.0624	0.0631	0.0637	0.0639	0.0642	0.0646

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min ≤X<10min(+12%~-12%), 10min ≤X<60min(+8%~-8%), X ≥60min(+5%~-5%)