

# POWER RELAY

## 1 POLE - 3A/5A Slim Type Relay

### FTR-F3 Series

#### ■ FEATURES

- High density mounting  
Slim type with 7mm width and 142mm<sup>2</sup> mounting space
- High insulation  
Insulation distance: minimum 6mm between coil and contact (conforms to IEC 60065)  
Dielectric strength: 4KV  
Surge strength: 10KV
- Glow wire compliant type available which satisfies GWT required for relay in IEC/EN60335-1
- Cadmium free contact for eco-program
- Safety standards  
UL, CSA, VDE, CQC
- Plastic sealed relay, RTIII
- RoHS compliant  
Please see page 6 for more information



#### ■ PARTNUMBER INFORMATION

[Example]  $\frac{\text{FTR-F3}}{\text{(a)}} \frac{\text{A}}{\text{(b)}} \frac{\text{A}}{\text{(c)}} \frac{\text{012}}{\text{(d)}} \frac{\text{E}}{\text{(e)}} - \frac{\text{HA}}{\text{(f)}} - \frac{\text{GW}}{\text{(g)}}$

(a)	Relay type	FTR-F3	: FTR-F3-Series
(b)	Contact configuration	A	: 1 form A (SPST-NO)
(c)	Coil type (power)	A	: 200mW
(d)	Coil rated voltage	012	: 5.....24 VDC Coil rating table at page 3
(e)	Contact material	E	: AgNi
(f)	Contact rating	Nil HA KS	: 3A type flux free : 5A type sealing confirmed : 3A type sealing confirmed
(g)	Special type	GW	: Comply with GWEPT (IEC60695-2-11)

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-F3AA012E-HA

Actual marking: F3AA012E

5A 250V~ 5A 30VDC marked on relay

# FTR-F3 SERIES

## ■ SPECIFICATION

Item	FTR-F3			
	FTR-F3AA( )E		FTR-F3AA( )E-HA	
Contact Data	Configuration		1 form A (SPST-NO)	
	Construction		Single	
	Material		AgNi	
	Resistance (initial)		Max. 100mOhm at 1A, 6VDC	
	Contact rating (resistive)		3A, 125VAC, 30VDC	5A, 250VAC, 30VDC
	Max. carrying current		5A	
	Max. switching voltage		277VAC, 30VDC	
	Max. switching power		750VA, 90W	1,250VA, 150W
	Min. switching load *		10 mA, 5VDC	
Life	Mechanical		Min. 5 x 10 <sup>6</sup> operations	
	Electrical (at rated load)		Min. 200 x 10 <sup>3</sup> operations	Min. 100 x 10 <sup>3</sup> operations
Coil Data	Rated power (20 °C)		200mW	
	Operate power		113mW	
	Operating temperature range		-40 °C to +70 °C (no frost)	
Timing Data	Operate (at nominal voltage)		Max. 10ms (without bounce, no diode)	
	Release (at nominal voltage)		Max. 10ms (without bounce, no diode)	
Insulation	Resistance (initial)		Min. 1,000MOhm at 500VDC	
	Dielectric strength	Open contacts	750VAC (50/60Hz) 1min	
		Contacts to coil	4,000VAC (50/60Hz) 1min	
	Surge strength	Contacts to coil	10,000V / 1.2 x 50µs standard wave	
	Clearance		6mm	
	Creepage		6mm	
	EN61810-1, VDE0435	Voltage		250V
Pollution degree		2		
Material group		III		
Other	Vibration resistance	Misoperation	10 to 55 to 10 Hz single amplitude 0.75mm	
		Endurance	10 to 55 to 10 Hz single amplitude 0.75mm	
	Shock	Misoperation	Min. 100m/s <sup>2</sup> (11±1ms)	
		Endurance	Min. 1,000m/s <sup>2</sup> (6±1ms)	
	Weight		Approximately 4g	
	Sealing		Plastic sealed RTIII	

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

200mW type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Rated Power (mW)
005	5	125	3.75	0.5	200
006	6	180	4.5	0.6	
009	9	405	6.75	0.9	
012	12	720	9	1.2	
018	18	1,620	13.5	1.8	
024	24	2,880	18	2.4	







Note 1: All values given in the coil table(s) are valid at 20°C ambient temperature, at zero contact current, without pre-energizing and are specified at pulse wave voltage.

Note 2: When applying a higher than rated coil voltage, please refer to the "coil temperature rise" and "operating range". Reference graphs for the effects on the relay operating behaviour.



## ■ SAFETY STANDARDS

Type	Compliance	Contact rating	
		FTR-F3	FTR-F3-HA
UL	UL 508 E63614	Flammability: UL 94-V0 (plastics)	
CSA	C22.2 No. 14 LR 40304	5A, 30VDC/277VAC (resistive) 6A, 277VAC (resistive) 3A, 30 VDC/ 277 VAC (resistive) 1/10 HP, 125VAC 1/8 HP, 277VAC Pilot duty: D300	3A, 30VDC/277VAC (resistive) 6A, 277VAC (resistive) 5A, 30 VDC/ 277 VAC (resistive) 1/10 HP, 250VAC (UL only), 1/10HP 125VAC 1/8 HP, 277VAC Pilot duty: D300
VDE	IEC61810-1	3A, 250 VAC, $\cos\phi = 1$ 3A, 30 VDC, L/R=0ms	5A, 250 VAC, $\cos\phi = 1$ 5A, 30 VDC, L/R=0ms
CQC	GB/T21711.1, GB15092.1 1002049449, 04001010925, 17002164382	3A 250VAC/30VDC (except-KS type)	5A 250VAC/30VDC

## CHARACTERISTIC DATA (Reference)

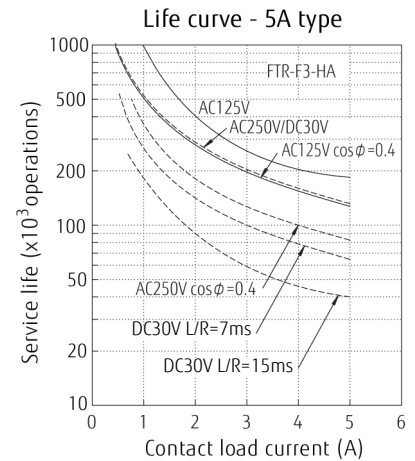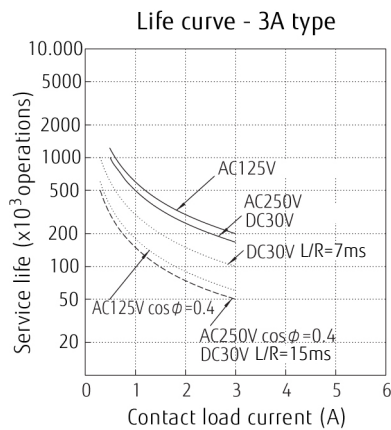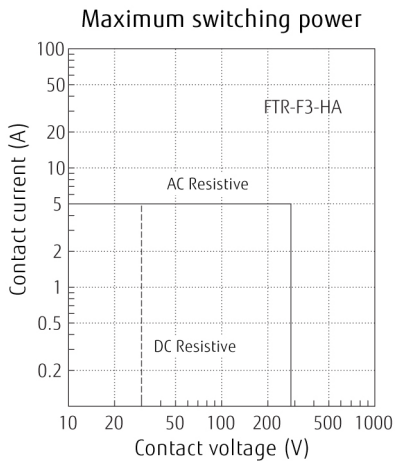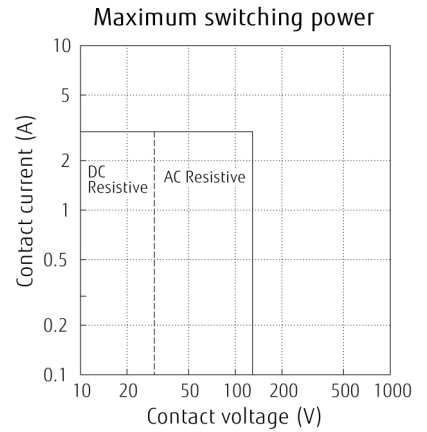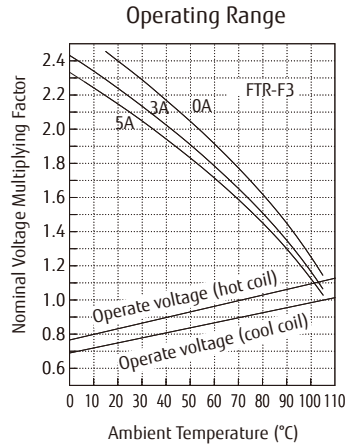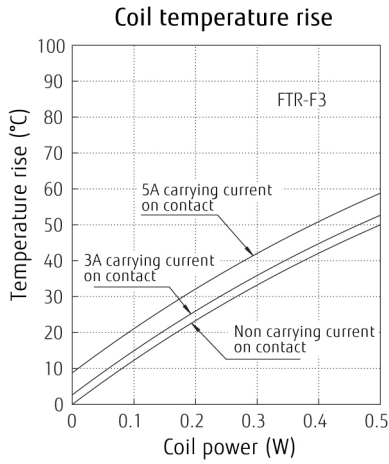


## REFERENCE DATA

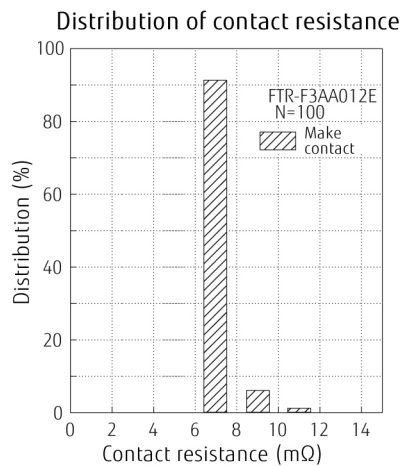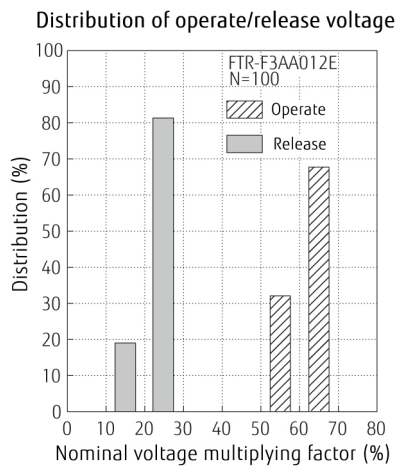


## ■ DIMENSIONS

Standard type


### ● Dimensions

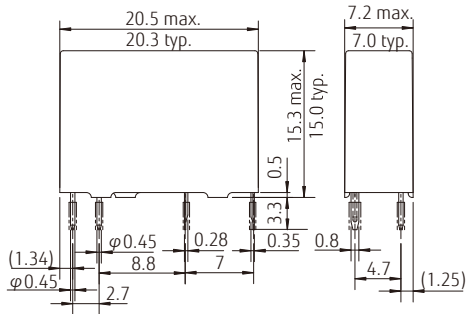

### ● Schematics (BOTTOM VIEW)



### ● PC board mounting hole layout (BOTTOM VIEW)

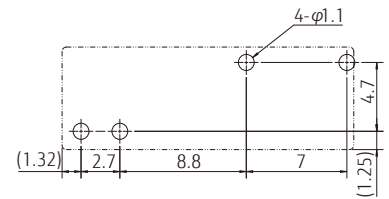

Unit: mm

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: maximum 120 °C  
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360 °C

Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

<p><b>Japan</b>            FUJITSU COMPONENT LIMITED            Shinagawa Seaside Park Tower 19F,            12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,            Tokyo, 140-0002, Japan            Tel: (81-3) 3450-1682            Fax: (81-3) 3474-2385            Email: fcl-contact@cs.jp.fujitsu.com            Web: www.fujitsu.com/jp/fcl/</p>	<p><b>Asia Pacific</b>            FUJITSU COMPONENTS ASIA, LTD.            102E Pasir Panjang Road            #01-01 Citilink Warehouse Complex            Singapore 118529            Tel: (65) 6375-8560            Fax: (65) 6273-3021            Email: fcal@sg.fujitsu.com            Web: www.fujitsu.com/sg/products/devices/components</p>	<p><b>Korea</b>            FUJITSU COMPONENTS KOREA LIMITED            Alpha Tower #403, 645 Sampyeong-dong,            Bundang-gu, Seongnam-si, Gyeonggi-do,            13524 Korea            Tel: (82) 31-708-7108            Fax: (82) 31-709-7108            Email: fcal@sg.fujitsu.com            www.fujitsu.com/sg/products/devices/components/</p>
<p><b>North and South America</b>            FUJITSU COMPONENTS AMERICA, INC            1230 E. Arques Ave. M/S 160            Sunnyvale, CA. 94085, USA            Tel: (1-408) 745-4900            Fax: (1-408) 745-4970            Email: components@us.fujitsu.com            Web: us.fujitsu.com/components</p>	<p><b>China</b>            FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.            Unit 4306, InterContinental Center            100 Yu Tong Road, Shanghai 200070,            China            Tel: (86-21) 3253 0998            Fax: (86-21) 3253 0997            Email: fcsh@cn.fujitsu.com            Web: www.fujitsu.com/cn/products/devices/components/</p>	
<p><b>Europe</b>            FUJITSU COMPONENTS EUROPE B.V.            Diamantlaan 25            2132 WV Hoofddorp            Netherlands            Tel: (31-23) 5560910            Fax: (31-23) 5560950            Email: info@fceu.fujitsu.com            Web: www.fujitsu.com/uk/components</p>	<p><b>Hong Kong</b>            FUJITSU COMPONENTS HONG KONG CO., LTD            Unit 506, Inter-Continental Plaza            No.94 Granville Road, Tsim Sha Tsui, Kowloon,            Hong Kong            Tel: (852) 2881-8495            Tex: (852) 2894-9512            Email: fcal@sg.fujitsu.com            Web: www.fujitsu.com/sg/products/devices/components/</p>	

© 2020 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch systems, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications.

Fujitsu warrants that its Products, if properly used and serviced, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. May 25, 2020